

light source **32 x OSRAM**

total consumption **85 W ± 5 %**

LED output @ **+ 25 °C + 50 °C + 70 °C**

total lm (LED) **13.246 lm 12.717 lm 12.452 lm**

lm / wat (LED) **156 lm/wat 150 lm/wat 146 lm/wat**

T_J (°C) **65 °C 85 °C 100 °C**

luminaire output @ 25 °C **11.699 lm - 12.717 lm**

LED working @ **45% [900 mA]**

input voltage **90-305 V**

input frequency **50 - 60 Hz**

LED driver **Inventronics LED driver**

LED driver efficiency **93,0%**

power factor @ full power **99%**

colour temperature **4000 K**

CRI **> 70**

secondary optics **no optics, N, W, WW, WWW, SHELVING**

radio dimming **optional** DALI **optional**

PIR sensor **optional** 0-10 **optional**

operating temperature **-30 °C to +70 °C**

mounting height **4 m to 20 m**

lamp lifespan **L70@100.000 hrs**

warranty on all components **50.000 hrs or 5 years**

housing – heatsink **extruded 99,7% aluminum**

optics cover **3.2 mm extra white tempered glass**

connection **IP66 connector**

cooling surface **0,62 m2**

IP rating **IP65**

IK code **IK08**

protection class IEC **class I**

rough service mark **YES**

lamp dimensions **A/B/C = 325/315/130 mm**

lamp weight **7,2 kg**


packaging dimensions **A/B/C = 425/320/150 mm**

packaging weight **7,7 kg**



SES Lighting radio dimming transmitter

Photometric curves

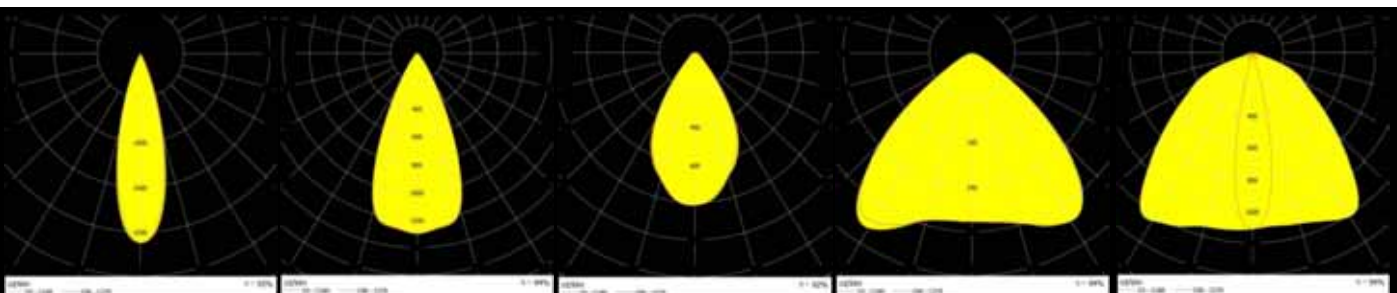

N NARROW(30°)

W WIDE(49°)

WW VERYWIDE(64°)

WWW VERYVERYWIDE(104°)

WH SHELVING (23°/111°)

beLine70A 85 W

Lamp version	optics	lm output	efficiency
85W beLine 70A [FR] - 32OGWN470-00FREE00-300A1	NO OPTICS	12.717 lm	150 lm/wat
85W beLine 70A [N] - 32OGWN470-30C13233-300A1	N (NARROW)	11.826 lm	139 lm/wat
85W beLine 70A [W] - 32OGWN470-49C14605-300A1	W (WIDE)	11.954 lm	141 lm/wat
85W beLine 70A [WW] - 32OGWN470-64C14606-300A1	WW (VERYWIDE)	11.699 lm	138 lm/wat
85W beLine 70A [WWW] - 32OGWN470-104C14724-300A1	WWW (VERYVERYWIDE)	11.954 lm	141 lm/wat
85W beLine 70A [WH] - 32OGWN470-WHC13749-300A1	WH (SHELVINGS)	11.954 lm	141 lm/wat

Other lamp performance options

Radio dimming is optional. Lamps with radio beBox dimming have -D at the end.

example: 85W beLine 70A-D [N] - 32OGWN470-30C13233-300A1

(Inventronics EUD series LED driver)

Lamps can have PIR sensor and dimming at the same time. Lamps have -PD at the end.

example: 85W beLine 70A-PD [N] - 32OGWN470-30C13233-300A1

(Inventronics EUD series LED driver)

Lamps can have a DALI LED driver inside. Lamps have -DALI at the end.

example: 85W beLine 70A-DALI [N] - 32OGWN470-30C13233-300A1

(Inventronics or Tridonic)

Lamps can have a 0-10 dimmable LED driver inside. Lamps have -(0-10) at the end.

example: 85W beLine 70A-(0-10) [N] - 32OGWN470-30C13233-300A1

(Inventronics EUD series LED driver)

INVENTRONICS programmable LED drivers (EUD series) are used for dimmable options. LED drivers come with 5 year warranty.

Mounting kit options



Reflector MC



Wall MC



Low ceiling MC




Steel chain



Wire hanging kit

Heat sink design

Unique linear design with vertical ribs allows the LEDs to have an optimal heat dissipation without a worry of them overheating. Side vertical ribs allow the dust to fall off the lamp and prevent accumulation of dust on the vital parts of the lamp.

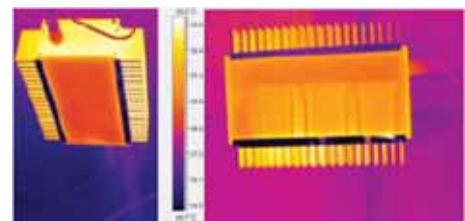

Certificates and protection

